

GRIGOKOLL 4.0

Laying of floors and walls

the
solution
you won't
stick away



**CATALOG
2022**

GRIGOKOLL 4.0

The Era of Knowledge

This catalog is inspired by a much discussed and current topic: the concept of “Industry 4.0”.

GRIGOKOLL 4.0 is the summary of research on materials for laying tiles to which Fornaci Calce Grigolin has been dedicated in recent years. The mission is to transfer technologies able to support installers with the best solutions to application problems.

GRIGOKOLL 4.0 is a tool developed to improve the working method, facing the fact that in the coming years, technological and demographic factors will deeply affect the evolution of the work.

This catalog is the response of Fornaci Calce Grigolin to the ongoing evolution in laying floors and walls.

GRIGOKOLL tiles glues and adhesives

“The solution you won’t stick away”



Our expertise comes from more than 55 years experience.




We know matter.

We work since 50 years, creating high-quality solutions and application cycles, able to perfectly meet the requirements of historic and contemporary buildings. We have gained a strong experience, which allows us today to offer the best solutions for laying floors and wall coverings.

In our laboratories in Italy and Germany, technicians and skilled researchers use the most advanced equipment and tools to go deeply into all problems that may occur during all processing steps.

In such a way we can be assured of the quality of our products, their effectiveness and especially their easy way of application.

We know how important it is to simplify the work of those who operate in the building sector.






Quality overlapping quality, in a virtuous development.

From lightened substrates and thermo-acoustic insulations to special composition of substrate screeds, from waterproofing solutions to characteristic formulations of tiles adhesives, ending to the high aesthetic look of grouting solutions.

All products have been grouped into 4 lines of high quality, confirming the leading role of Fornaci Calce Grigolin among building materials professionals.


- | | |
|--|---------|
| 1. BaseForte®
Lightened substrates and Screeds | pag. 7 |
| 2. AquaTutor®
Waterproofings | pag. 23 |
| 3. GrigoKoll®
Tile adhesives | pag. 31 |
| 4. FugaStyle®
Grouting joints | pag. 49 |

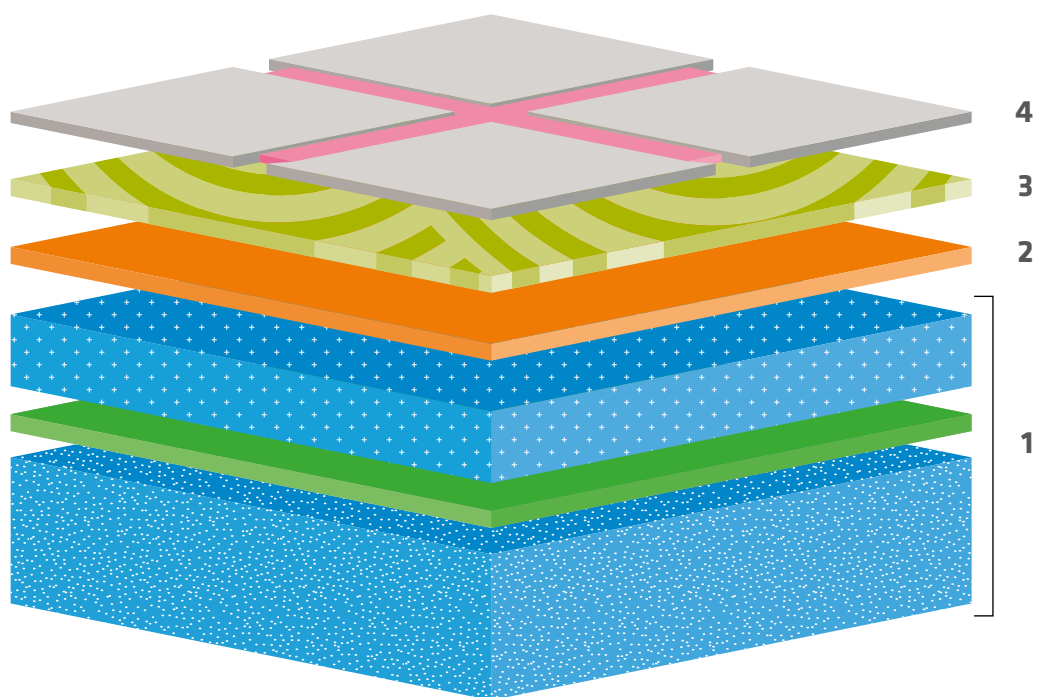

This catalog has the sole purpose of introducing our technical solutions: for all the specifications, the preparation of the supports and the installation of our products, it is mandatory to refer to the individual technical data sheets, downloadable from the website www.fornacigrigolin.it

*Start from a good base,
you will guarantee your work a long
future.*



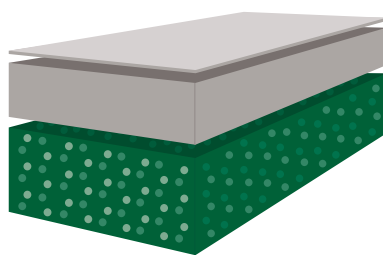

BaseForte®

Lightened substrates and screeds

BaseForte® product range is composed by several layers, closely related with each other, with different chemical and physical characteristics:

- **Lightened substrates**
- **Screeds**
- **Skim plasters**
- **Primer**

The main function played by the lightweight substrates and screeds is to give the right stability to the subsequent phases of the flooring and finish. It is therefore essential to make a proper project even before the installation.

Verification of the existing substrate, thickness, mechanical strength, thermal and acoustic insulation, “chemistry” of the substrate (cement-based or anhydrite): these are the elements to be analyzed and defined during the design phase to achieve the expected result.

During the installation, attention should be paid to some elements which may affect the final result and durability: the residual humidity of the substrate and the planarity of the same.



BaseForte® ANIDRIMASS

BASEFORTE ANIDRIMASS is a self-levelling screed suitable for interior floors with ceramic tiles, moquette, parquet, linoleum, resilient floors, for civil use (residences, offices, commercial activities).

It can be applied on lightened concrete, foam concrete and cement screed in general, with previous application of vapour barrier or suitable primer, insulating primer and perimeter rubber band.



Fields of use

- restoration on historical-architectural buildings
- ideal for application on heating/cooling floors and on traditional floors
- ideal for eco-building thanks to its natural binder
- large surfaces

Appearance

consistency: fluid
colour: light grey

Consumption

18 kg/m² per cm of thickness

Data sheet

classification	CA C30 F6
Water in the mix	approx. 16%
Pot life	approx. 30 min after mixing
Time till walk-on	24 hrs
Drying time at 20°C and 50% R.H.	1 week per cm of thickness, up to 3 cm 2 weeks for each additional cm
Waiting time for thermal shock	7 days

WARNING: in the presence of underfloor heating it is obligatory to carry out the ignition system test - thermal shock - following the protocol reported in the relevant technical data sheet.

CODE	PACKAGE	PACKAGE/PAL
1101005032	25 kg	54
1701010084	silos	-

For the correct application please refer to the datasheet on the website www.fornacigrigolin.it

BaseForte® ANIDRILEVEL

High-performance self-levelling mortar with controlled shrinkage, based on selected inert, anhydrite and specific additives, for thickness from 3 to 30 mm.

BASEFORTE ANIDRILEVEL has a high thermal conductivity, is ideal for eco-building thanks to the natural binder, to be used exclusively for interiors.



Fields of use

- Self-levelling layers with thickness from 3 to 30 mm in civil settings to be floored with ceramic tiles or parquet
- Large areas
- Ideal for application on heating/cooling floors and on traditional floors

Appearance

consistency: fluid
colour: light grey

Consumption

19 kg/m² per cm of thickness

Data sheet

classification	CA C30 F6
Water in the mix	approx. 17-18%
Pot life	approx. 30 min after mixing
Time till walk-on	24 hrs
Drying time at 20°C and 50% R.H.	1 week per cm of thickness, up to 3 cm
Waiting time for thermal shock	7 days

WARNING: in the presence of underfloor heating it is obligatory to carry out the ignition system test - thermal shock - following the protocol reported in the relevant technical data sheet.

CODE	PACKAGE	PACKAGE/PAL
1101005031	25 kg	54
1701010090	silos	-

For the correct application please refer to the datasheet on the website www.fornacigrigolin.it

BaseForte® PLANOMIX

Ready to use, lightweight thermal insulating base screed with fine beads.

BASEFORTE PLANOMIX is particularly suitable for operations where it is necessary to lighten the structure, as a substrate, as an intermediate filling or leveling layer for systems under self-leveling and traditional screeds, for leveling vaulted floors and roofs.



Fields of use

- realization of floating lightened screeds, even single-layered, with minimum thickness of 5 cm (refer to the datasheet)
- lightweight thermal insulating base screeds (with or without gradient formation)
- lightening and filling castings
- roof thermal insulation (pitched or flat roofs with or without gradient formation)
- suitable for direct laying of prefabricated waterproofing membranes (hot bituminous, cold bituminous, cold synthetic) or solvent-free liquid sheaths

Appearance

consistency: granular

Consumption

1 m³ of lightweight thermal insulating mortar is obtained with approx. 25 bags (depending on the equipment used and the accuracy of the mix)

Data sheet

water in the mix	approx. 5,5-6,5 l/sack
waiting time for floating laying of parquet (3% R.H.)	approx. 7 days*

* Drying time for direct laying of floor coverings (screed thickness 5 cm, absorbent surface and ambient conditions +20°C - U.R. 50%) according to the laying surface, the environmental and weather conditions.
Waiting time at standard thermohygrometric conditions necessary to reach the suitable humidity for laying wooden floors, measuring this level with a carbide hygrometer. For any clarification, contact our Technical Assistance Service.

CODE	PACKAGE	PACKAGE/PAL
1101005030	40 liters	44

For the correct application please refer to the datasheet on the website www.fornacigrigolin.it

BaseForte® AR 97

Self-leveling cement screed, with compensated shrinkage, for the realization of substrates for ceramic floors, carpets, parquet, linoleum, resilient floors.

BASEFORTE AR 97 is suitable and **recommended for laying on underfloor heating**, thanks to its optimal characteristics both during application and during setting.



Fields of use

- realization of floating screeds with minimum thickness of 3 cm
- realization of heating and cooling screeds, by drowning the radiant coils

Appearance

consistency: fluid
color: grey

Consumption

approx. 19-20 kg/m² per cm of thickness

Data sheet

classification	CT C20 F5
maximum mixing time	3 min
water in the mix	approx. 15%
pot life	approx. 30 min after mixing
time till walk-on	12-24 h
waiting time for ceramic laying	7-10 days
waiting time for laying natural stones	28 days*
waiting time for laying parquet and resilient floors (2% R.H.)	28 days*

* Waiting time at standard thermohygrometric conditions necessary to reach the suitable humidity for laying wooden floors, measuring this level with a carbide hygrometer. For any clarification, contact our Technical Assistance Service. **WARNING:** in the presence of underfloor heating it is obligatory to carry out the ignition system test - thermal shock - following the protocol reported in the relevant technical data sheet.

CODE	PACKAGE	PACKAGE/PAL
1101005003	25 kg	54
1701010004	silos	-

For the correct application please refer to the datasheet on the website www.fornacigrigolin.it

BaseForte® MIXCEM PRONTO

Ready-to-use screed for indoor and outdoor flooring, with **fast drying**, **normal curing** and **controlled shrinkage**.

Particularly suitable as screed for floors in natural stones, wood, resilient floors, ceramics and waterproofing of any kind.

BASEFORTE MIXCEM PRONTO is the ideal screed for heating and cooling floors and as a base for the application of waterproofing materials.



Fields of use

- realization of floating screeds with minimum thickness of 4 cm
- realization of adherent screeds with thicknesses from 1 to 4 cm, after application of grouting mortar
- realization of heating and cooling screeds, by drowning the radiant coils

Appearance

consistency: granular
color: grey

Consumption

approx. 18-20 kg/m² per cm of thickness

Data sheet

classification	CT C30 F6
maximum mixing time	3 min
water in the mix	8% until texture similar to moist soil
pot life	60 min
time till walk-on	24 h
waiting time for ceramic laying	24 h
waiting time for laying natural stones	3 days*
waiting time for laying parquet and resilient floors (2% R.H.)	6/8 days*

* Waiting time at standard thermohygrometric conditions necessary to reach the suitable humidity for laying wooden floors, measuring this level with a carbide hygrometer. For any clarification, contact our Technical Assistance Service.
WARNING: in the presence of underfloor heating it is obligatory to carry out the ignition system test - thermal shock - following the protocol reported in the relevant technical data sheet.

CODE	PACKAGE	PACKAGE/PAL
1101005006	25 kg	54
1701010029	silos	-

For the correct application please refer to the datasheet on the website www.fornacigrigolin.it

BaseForte® SF 300

Ready-to-use traditional type screed for indoor and outdoor flooring, with normal setting and high workability. BASEFORTE SF 300 is indicated as a screed for glue laying of natural stones, wood, resilient floors, ceramics and waterproofing of any type, and for heating or cooling screeds.



Fields of use

- realization of floating screeds with minimum thickness of 4 cm
- realization of adherent screeds with thicknesses from 2 to 4 cm, after application of grouting mortar
- realization of heating and cooling screeds, by drowning the radiant coils

Appearance

consistency: granular
color: grey

Consumption

approx. 18-20 kg/m² per cm of thickness

Data sheet

classification	CT C20 F5
maximum mixing time	3 min
water in the mix	8% until texture similar to moist soil
pot life	60 min
time till walk-on	24 h
maximum grain size	3 mm

WARNING: in the presence of underfloor heating it is obligatory to carry out the ignition system test - thermal shock - following the protocol reported in the relevant technical data sheet.

CODE	PACKAGE	PACKAGE/PAL
1101005008	30 kg	54
1701010040	silos	-

For the correct application please refer to the datasheet on the website www.fornacigrigolin.it

BaseForte® SF 400

Ready-to-use traditional type screed for indoor and outdoor flooring, with normal setting and high workability. BASEFORTE SF 400 is indicated as a screed for glue laying of natural stones, wood, resilient floors, ceramics and waterproofing of any type, and for heating or cooling screeds.



Fields of use

- realization of floating screeds with minimum thickness of 4 cm
- realization of adherent screeds with thicknesses from 2 to 4 cm, after application of grouting mortar
- realization of heating and cooling screeds, by drowning the radiant coils

Appearance

consistency: granular
color: grey

Consumption

approx. 18-20 kg/m² per cm of thickness

Data sheet

classification	CT C20 F5
maximum mixing time	3 min
water in the mix	8% until texture similar to moist soil
pot life	60 min
time till walk-on	24 h
maximum grain size	4 mm

WARNING: in the presence of underfloor heating it is obligatory to carry out the ignition system test - thermal shock - following the protocol reported in the relevant technical data sheet.

CODE	PACKAGE	PACKAGE/PAL
1101005009	25 kg	54
1701010044	silos	-

For the correct application please refer to the datasheet on the website www.fornacigrigolin.it

BaseForte® RIPARAMASS

Two-component epoxy adhesive, pourable, for monolithic sealing of joints and cracks in the cement-based screeds, anhydrite and concrete.

BASEFORTE RIPARAMASS is suitable for bonding rods or plates to the concrete substrate.



Fields of use

- construction joints in cement screeds or concrete
- repair of aging cracks in cement-based substrates
- adhesion on smooth surfaces for leveling and plastering
- bonding rods or plates to the concrete substrate

Appearance

component A light grey paste
component B liquid

Consumption

construction joints 0,5-0,7 kg/m²
repair of cracks 1,35 kg/l of cavity to be filled

Data sheet

pot life	25 min
final hardening time	> 7 days

CODE

1101090006*

PACKAGE

PACKAGE 5 kg (A+B)

*available only on request

For the correct application please refer to the datasheet on the website www.fornacigrigolin.it

BaseForte® GRIGOLEVEL 1_10

High-performance self-leveling screed,
for **indoor and outdoor flooring**, for application thicknesses
from 1 to 10 mm.

BASEFORTE GRIGOLEVEL 1_10 has a great adhesive capacity
and, once hardened, it has a very smooth surface, perfect for
laying the floor with ceramic of any type, parquet and resilient.



Fields of use

- self-leveling plastering from 1 to 10 mm, in civil and industrial construction
- industrial flooring
- realization of heating and cooling screeds

Appearance

consistency: fine powder
color: grey

Consumption

approx. 14-16 kg/m² per cm of thickness

Supports

- cement screeds in general
- BASEFORTE MIXCEM PRONTO or equivalent screeds
- very absorbent cement base screeds - previously treated with PRIMER IDROX
- smoothed concrete screeds, old ceramic or marble floors - previously treated with BASEFORTE PRIMER X
- carefully evaluate the nature and the state of the support, as well as the intended use to identify the most suitable primer and thickness of application

Data sheet

classification	CT C30 F7
pot life	30 min
mechanical resistance to compression at 28 days	> 30 N/mm ²
time till walk-on	3 h
water in the mix	22-24%
waiting time for ceramic laying	24 h
waiting time for laying natural stones	24 h
waiting time for laying parquet and resilient floors (2% R.H.)	48 h*

* Waiting time at standard thermohygrometric conditions necessary to reach the suitable humidity for laying wooden floors, measuring this level with a carbide hygrometer. For any clarification, contact our Technical Assistance Service.
WARNING: in the presence of underfloor heating it is obligatory to carry out the ignition system test - thermal shock - following the protocol reported in the relevant technical data sheet.

CODE	PACKAGE	PACKAGE/PAL
1101005016	25 kg	54

BaseForte®

GRIGOLEVEL 5_30

High-performance self-leveling screed,
for **indoor and outdoor flooring**, for application thicknesses
from 5 to 30 mm **in one layer**.

BASEFORTE GRIGOLEVEL 5_30 has a great adhesive capacity
and, once hardened, it has a very smooth surface, perfect for
laying the floor with ceramic of any type, parquet and resilient.



Fields of use

- self-leveling plastering from 5 to 30 mm, in civil and industrial construction
- industrial flooring
- realization of heating and cooling screeds

Appearance

consistency: powder
color: grey

Consumption

approx. 14-16 kg/m² per cm of thickness

Supports

- cement screeds in general
- BASEFORTE MIXCEM PRONTO or equivalent screeds
- very absorbent cement base screeds - previously treated with PRIMER IDROX
- smoothed concrete screeds, old ceramic or marble floors - previously treated with BASEFORTE PRIMER X
- carefully evaluate the nature and the state of the support, as well as the intended use to identify the most suitable primer and thickness of application

Data sheet

classification	CT C35 F7
pot life	30 min
mechanical resistance to compression at 28 days	> 35 N/mm ²
time till walk-on	3 h
water in the mix	22-24%
waiting time for ceramic laying	24 h
waiting time for laying natural stones	24 h
waiting time for laying parquet and resilient floors (2% R.H.)	48 h*

* Waiting time at standard thermohygrometric conditions necessary to reach the suitable humidity for laying wooden floors, measuring this level with a carbide hygrometer. For any clarification, contact our Technical Assistance Service.
WARNING: in the presence of underfloor heating it is obligatory to carry out the ignition system test - thermal shock - following the protocol reported in the relevant technical data sheet.

CODE	PACKAGE	PACKAGE/PAL
1101005017	25 kg	54

For the correct application please refer to the datasheet on the website www.fornacigrigolin.it

BaseForte®

GRIGOFORMA 3_30

Fiber-reinforced thixotropic technical skim plaster, shrinkage free, for indoor and outdoor flooring, with thicknesses from 3 to 30 mm.

BASEFORTE GRIGOFORMA 3_30 is resistant even to aggressive weathering, and it is also suitable for surface recovery of concrete elements.



Fields of use

- skim plastering with thicknesses from 3 to 30 mm in civil and industrial building
- skim plastering or restoring on concrete surfaces and swimming pools, before installing ceramic or waterproofings, such as AQUATUTOR GRIGOFLEX or GRIGOSTOP
- realization of heating and cooling screeds
- reconstruction of balconies, cornices, regularization of columns or steps in concrete, with thicknesses from 3 to 30 mm

Appearance

consistency: powder
color: grey

Consumption

approx. 15-17 kg/m² per cm of thickness

Supports

- sand and cement screeds, mortars, brick walls, concrete
- BASEFORTE MIXCEM PRONTO or equivalent screeds

Data sheet

classification	CT C20 F6 R2 GP-CSIV-W1
pot life	15 min
mechanical resistance to compression at 28 days	> 20 N/mm ²
time till walk-on	4-6 h
waiting time for ceramic laying	12 h
waiting time for laying natural stones	24 h
waiting time for laying parquet and resilient floors (2% R.H.)	48 h*
waiting time for laying cement waterproofings	12 h

* Waiting time at standard thermohygrometric conditions necessary to reach the suitable humidity for laying wooden floors, measuring this level with a carbide hygrometer. For any clarification, contact our Technical Assistance Service.
WARNING: in the presence of underfloor heating it is obligatory to carry out the ignition system test - thermal shock - following the protocol reported in the relevant technical data sheet.

CODE	PACKAGE	PACKAGE/PAL
1101005018	25 kg	54

For the correct application please refer to the datasheet on the website www.fornacigrigolin.it

BaseForte® DTG BASICO

Basic solution cleaner for the removal of oils, fats and waxes, essential before overlapping on an existing floor. BASEFORTE DTG BASICO is ready to use and is applied with a hard brush or with a normal household scrub brush. Wash thoroughly at the end of application to avoid the formation of halos.



Fields of use

- removal of residues of oils, greases, waxes and smog deposits, from any type of nonabsorbent surfaces
- washing old ceramic or natural stone floors before overlapping a new coating

Appearance

consistency: liquid
color: straw yellow

Consumption

approx. 100-200 g/m²

Data sheet

pH 13 +/- 0,5

CODE	PACKAGE	PACKAGE/BOX
1101090010	1 kg	12
1101090011	10 kg	-

For the correct application please refer to the datasheet on the website www.fornacigrigolin.it

BaseForte® REMAS

Silicate mineral impregnating base for cement screeds.
BASEFORTE REMAS penetrates deep and gives high resistance to the substrate, increasing the cohesion of the structure in the surface and throughout its thickness.



Fields of use

- consolidating treatment for cement-based substrates, gives high mechanical strength
- excellent as an anti-dust treatment
- to be used on crumbling screeds or deficient in binder
- do not use on self-leveling screed

Appearance

consistency: fluid liquid
color: transparent

Consumption

approx. 400-1000 gr/m² according to the substrate absorption

Data sheet

waiting time to cover again	24-48 h
depending on R.H. value	when dry

CODE	PACKAGE	PACKAGE/PAL
1102560030*	25 kg	40

*available only on request

For the correct application please refer to the datasheet on the website www.fornacigrigolin.it

BaseForte® FIBER L20

Alkali-resistant synthetic fiber for cement screeds.
BASEFORTE FIBER L20 improves the screed making it more resistant to abrasion and impact, it allows to reduce the formation of shrinkage cracks.



Fields of use

- for traditional screeds based on cement, lime-cement, lime, even in the case of heating or cooling screeds
- ideal for quick-drying screeds and controlled shrinkage, replacing the wire mesh
- ideal with BASEFORTE MIXCEM PRONTO replacing the wire mesh

Appearance

gray COLOURd fibers
length 20 mm

Consumption

approx. 1-3 kg/m³ or 0,5% on the cement dosage

Data sheet

length	20 mm
tensile strength	600-700 MPa
elastic module	3500 MPa
resistance to cement alkalis	optimal
equivalent diameter	0,48 mm

CODE

1101065001

PACKAGE

1 kg

For the correct application please refer to the datasheet on the website www.fornacigrigolin.it

BaseForte® PRIMER IDROX

Water and synthetic resins-based primer, for the preparation of cement or gypsum-based substrates. BASEFORTE PRIMER IDROX has a binding and film-forming ability that determines a high performance in **consolidation and isolation** of the substrate to be treated. It is also ideal to **regularize and standardize the degree of absorption of the substrate**.



Fields of use

- treatment of plaster and plasterboard on which glues or cement-based skim plasters will be applied, to achieve compatibility and improve adhesion
- surface treatment of very absorbent plasters, skim plasters or screeds, based on cement, lime, gypsum

Appearance

consistency: fluid liquid
color: white

Consumption

approx. 100-200 g/m²

Data sheet

drying time 2 h

CODE	PACKAGE	PACKAGE/PAL
1102560035	5 kg	80
1102560036	20 kg	33

For the correct application please refer to the datasheet on the website www.fornacigrigolin.it

BaseForte® PRIMER WD DILUENTE WD

Strengthening primer to be used in wood flooring, with a **vapor barrier effect on screeds**.

BASEFORTE PRIMER WD, together with DILUENTE WD, is used before applying the adhesives GRIGOKOLL WOOD TEC and WOOD BIOTEC with screeds of residual moisture up to 5% or which need to be strengthened.



Fields of use

- consolidating cement and anhydrite screeds
- anti-humidity barrier for cement screeds, before laying wooden floors, with maximum humidity 5%

Appearance

consistency: fluid liquid
color: amber

Consumption

approx. 200-300 g/m²

Supports

- cement substrates or lime cement
- rapid or semi-rapid hydration screeds
- anhydrite screeds (smoothed)
- fiber cement

Data sheet


dilution	<i>as a superficial consolidant</i>
	2:1 with DILUENTE WD
	<i>as a deep consolidant</i>
	1:1 with DILUENTE WD
	<i>as a anti-humidity barrier</i>
	1:1 with DILUENTE WD

CODE	PRODUCT	PACKAGE
1101090012	PRIMER	10 kg
1101090013	DILUENTE	10 kg

For the correct application please refer to the datasheet on the website www.fornacigrigolin.it

*Writing on water is for those who
visualize worlds,
stopping water is for those who want
to build those worlds.*



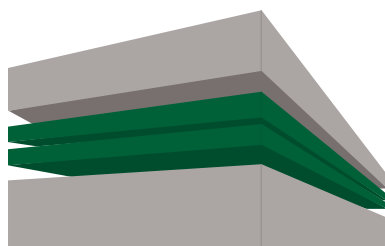

AquaTutor®

Waterproofers

The **Waterproofing** effect is created by overlapping one or more layers of different materials to protect constructive elements of various kinds such as floors, walls, tanks, manholes, pools. The materials used are of various kinds, the choice varies according to: aesthetics, thickness and weight.

Preparation

Before waterproofing it is necessary to remove loose particles and dust, and smooth the surface with appropriate products and / or specific preparations (primer). Keep in mind that eventual humidity existing in the construction element can no longer evaporate through the waterproofing zone, therefore it is necessary to wait for the ideal climatic conditions measuring the humidity with a special meter.



AquaTutor® GRIGOSTOP

Fiber-reinforced mono-component flexible waterproofing mortar, for swimming pools, terraces, balconies and concrete structures.

AQUATUTOR GRIGOSTOP **remains elastic even at low temperatures** (up to -5°C), and can also be used in tanks and channels containing drinking water.



Fields of use

- waterproofing terraces, balconies, bathrooms
- waterproofing and protection of hydraulic structures such as basins, tanks, concrete pipes, channels
- protection of external and underground walls

Appearance

consistency: powder
color: grey

Consumption

approx. 1,2 kg/m² per mm of thickness

Supports

- cement screeds and plasters
- mortars
- old ceramic, marble, wood floors
- concrete
- plasterboard

Data sheet

maximum application thickness (one layer)	2 mm
maximum application thickness (total)	min. 3 mm in two layers
waiting time between 1st and 2nd layer	approx. 3-5 h
waiting time for ceramic laying	approx. 3-4 days

CODE	PACKAGE	PACKAGE/PAL
110505006	20 kg	40

For the correct application please refer to the datasheet on the website www.fornacigrigolin.it

AquaTutor® GRIGOSTOP HD

Liquid ready-to-use waterproofing membrane, for indoor and outdoor use, UV rays resistant and fast drying. AQUATUTOR GRIGOSTOP HD is highly resistant to atmospheric agents and temperature variations.



Fields of use

- waterproofing terraces, balconies, bathrooms, old membranes, foundation walls
- rainwater drainage channels
- walkable flat roofs

Appearance

consistency: liquid
color: grey

Consumption

approx. 1,2 kg/m² per mm of thickness

Supports

- cement screeds and plasters
- mortars
- concrete
- plasterboard

Data sheet

maximum application thickness (one layer)	1 mm
maximum application thickness (total)	min. 2 mm in two layers
waiting time between 1st and 2nd layer	approx. 1 h
waiting time for ceramic laying	approx. 3-4 h <i>wall</i> approx. 12-24 h <i>floor</i>

CODE	PACKAGE	PACKAGE/PAL
1101590005	5 kg	90
1101590006	15 kg	33

For the correct application please refer to the datasheet on the website www.fornacigrigolin.it

AquaTutor® GRIGOFLEX FIBRA

Cement-based , **fiber-reinforced**, two-component, elastic waterproofing coating for terraces, balconies, bathrooms, swimming pools and concrete protection.

AQUATUTOR GRIGOFLEX FIBRA **remains elastic even at very low temperatures** (up to -20°C) and resists saline and sulphate attacks.

AQUATUTOR GRIGOFLEX FIBRA can be applied without reinforcement mesh on continuous surfaces, up to 10 m².



Fields of use

- waterproofing terraces, balconies, bathrooms, swimming pools
- waterproofing and protection of hydraulic structures such as basins, tanks, concrete pipes, channels
- protection of external and underground walls
- anti-carbonation mortar for concrete

Appearance

consistency: grey powder
white COLOURd latex

Consumption

approx. 1,7 kg/m² per mm of thickness (A+B)

Supports

- cement screeds and plasters
- mortars
- old ceramic, marble, wood floors
- concrete
- plasterboard

Data sheet

maximum application thickness (one layer)	2 mm
maximum application thickness (total)	min. 3 mm in two layers
waiting time between 1st and 2nd layer	approx. 4-5 h
waiting time for ceramic laying	approx. 5-6 days
crack-bridging + 23 °C (EN 1062-7)	
Prüfbericht P 8737 - Kiwa Polymer Institut GmbH	0,4 mm

CODE	TYPE	PACKAGE	PACKAGE/PAL
1101505003	comp. A	25 kg	54
1101505004	comp. B	9 kg	54

For the correct application please refer to the datasheet on the website www.fornacigrigolin.it

AquaTutor® GRIGOCEM

Grey **osmotic cement mortar for waterproofing**, even in negative thrust, for masonry and concrete.

AQUATUTOR GRIGOCEM can be used both indoors and outdoors, and is highly resistant to atmospheric agents.



Fields of use

- waterproofing terraces, balconies, bathrooms
- waterproofing and protection of hydraulic structures such as basins, tanks, concrete pipes, channels
- protection of walls against ground, exterior walls and basements
- anti-carbonation mortar for concrete

Appearance

consistency: grey powder

Consumption

approx. 1,5 kg/m² per mm of thickness

Supports

- cement screeds and plasters
- mortars
- old ceramic, marble, wood floors
- concrete
- plasterboard

Data sheet

maximum application thickness (total)	max 2-3 mm in two layers
waiting time between 1st and 2nd layer	approx. 2 h

CODE	PACKAGE	PACKAGE/PAL
110505008	25	54

For the correct application please refer to the datasheet on the website www.fornacigrigolin.it

AquaTutor® ACCESSORIES

Sealing band for joints.

Reinforcing band.

Pre-shaped corner pieces.


Alkali-resistant glass fiber mesh, primed and reinforced with approx. 4x4 mm and weight of 160 gr/m² +/- 5%.



CODE	PRODUCT	PACKAGE
1101590007	bandella sigillante h=12 cm	50 m
1101590008	bandella di rinforzo h=14 cm	50 m
1101590009	angolare	25 pz
1205090001	rete h = 1,10 m	55 m ²

*The right solution is below the eyes of
who knows what to look for.*



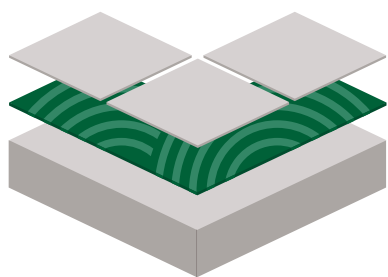

GrigoKoll®

Tile adhesives

To properly lay ceramic tiles or stone materials on a floor or wall, it is necessary to individuate the most suitable adhesive, according to the substrate's characteristics, the type of tile, the thickness to be achieved, and the intended use of the room.

Tile adhesives play a strategic role in the laying process and must meet the requirements set by the international guidelines regarding quality and safety.



GrigoKoll® PLUX

White and grey adhesive for laying absorbent tiles on absorbent supports.
GRIGOKOLL PLUX can be used both indoors and outdoors, on walls and floors.



Fields of use

- floor and wall laying of double-fired and single-fired ceramic tiles
- laying of brick, natural stone and marble, as long as not sensitive to water
- laying of absorbent ceramic mosaics

Appearance

consistency: powder
color: white/grey

Consumption

approx. 3-4 kg/m²

Supports

- cement screeds and plasters
- mortars
- gypsum based plasters and anhydrite screeds, after application of PRIMER IDROX

Data sheet

classification	C1
water in the mix	approx. 6,5-7 l/bag
open time	20 min
adjustability time	45 min
time till walk-on	24-36 h
grouting	24-36 hrs on floor 4-6 hrs on wall

Adherence to substrate according to UNI EN 12004-2

adherence to initial traction	> 0,5 N/mm ²
adherence to traction after water immersion	> 0,5 N/mm ²
adherence to traction after heat action	> 0,5 N/mm ²
adherence to traction after cycles of freezing/melting	> 0,5 N/mm ²

CODE	COLOUR	PACKAGE	PACKAGE/PAL
1102005002	grey	25 kg	54
1102005001	white	25 kg	54

For the correct application please refer to the datasheet on the website www.fornacigrigolin.it

GrigoKoll® PROX

White and grey adhesive for laying absorbent tiles on absorbent supports.

GRIGOKOLL PROX is a thixotropic product with excellent workability and extended open time, can be used both indoors and outdoors and is suitable for both walls and floors.



Fields of use

- floor and wall laying of double-fired and single-fired ceramic tiles
- laying of brick, natural stone and marble, so long as not affected by water
- laying of absorbent ceramic mosaics

Appearance

consistency: powder
color: white/grey

Consumption

approx. 3-4 kg/m²

Supports

- cement screeds and plasters
- mortars
- gypsum based plasters and anhydrite screeds, after application of PRIMER IDROX

Data sheet

classification	CITE
water in the mix	approx. 6,5-7 l/bag
open time	30 min
adjustability time	60 min
time till walk-on	24-36 h
grouting	24-36 hrs on floor 4-6 hrs on wall

Adherence to substrate according to UNI EN 12004-2

adherence to initial traction	> 0,5 N/mm ²
adherence to traction after water immersion	> 0,5 N/mm ²
adherence to traction after heat action	> 0,5 N/mm ²
adherence to traction after cycles of freezing/melting	> 0,5 N/mm ²

CODE	COLOUR	PACKAGE	PACKAGE/PAL
1102005004	grey	25 kg	54
1102005003	extra white	25 kg	54

For the correct application please refer to the datasheet on the website www.fornacigrigolin.it

GrigoKoll® FLEX

White and grey flexible adhesive for laying of ceramic tiles of any type, even overlapping existing coatings.
GRIGOKOLL FLEX is ideal for laying of natural stones, provided they are not sensitive to water.
It can be used both indoors and outdoors.



Fields of use

- laying floor and wall of all types of ceramics
- laying in civil, industrial and commercial spaces, even with high traffic
- laying of natural stone and marble provided they are not sensitive to water
- overlapping small-format ceramics (900 cm²)

Appearance

consistency: powder
color: white/grey

Consumption

approx. 3-4 kg/m²

Supports

- cement screeds and plasters
- old ceramic pavements
- mortars
- plasterboard, gypsum based plasters and anhydrite screeds, after application of PRIMER IDROX

Data sheet

classification	C2TE
water in the mix	approx. 6,5-7 l/bag
open time	30 min
adjustability time	60 min
time till walk-on	24-36 h
grouting	24-36 hrs on floor 4-6 hrs on wall

Adherence to substrate according to UNI EN 12004-2

adherence to initial traction	1,5 N/mm ²
adherence to traction after water immersion	1,5 N/mm ²
adherence to traction after heat action	1,6 N/mm ²
adherence to traction after cycles of freezing/melting	1,6 N/mm ²

CODE	COLOUR	PACKAGE	PACKAGE/PAL
1102005006	grey	25 kg	54
1102005005	white	25 kg	54

For the correct application please refer to the datasheet on the website www.fornacigrigolin.it

GrigoKoll® TEX

White and grey flexible adhesive, with high workability and high yield, for **laying of ceramic tiles of any type and size**, even overlapping existing coatings. GRIGOKOLL FLEX is ideal for laying of natural stones, provided they are not sensitive to water. It can be used both indoors and outdoors, on walls and floors.



Fields of use

- laying ceramic tiles of all types, including large format
- laying in civil, industrial and commercial spaces, even with high traffic
- laying of natural stone and marble provided they are not sensitive to water
- overlapping existing tiles

Appearance

consistency: powder
color: white/grey

Consumption

approx. 2,5-3,5 kg/m²

Supports

- cement screeds and plasters, mortars, concrete, even smoothed
- old ceramic floors and natural stone
- cement and acrylic waterproofing
- plasterboard, gypsum based plasters and anhydrite screeds, after application of PRIMER IDROX

Data sheet

classification	C2TE
water in the mix	approx. 7-7,5 l/bag
open time	30 min
adjustability time	60 min
time till walk-on	24-36 h
grouting	24-36 hrs on floor 4-6 hrs on wall

Adherence to substrate according to UNI EN 12004-2

adherence to initial traction	1,8 N/mm ²
adherence to traction after water immersion	1,6 N/mm ²
adherence to traction after heat action	1,7 N/mm ²
adherence to traction after cycles of freezing/melting	1,6 N/mm ²

CODE	COLOUR	PACKAGE	PACKAGE/PAL
1102005008	grey	25 kg	54
1102005009	white	25 kg	54

For the correct application please refer to the datasheet on the website www.fornacigrigolin.it

GrigoKoll® MAX

White and grey flexible adhesive, with high performance, workability and yield, for laying of ceramic tiles and mosaics of any type and size, and natural stones, provided they are not sensitive to water.

GRIGOKOLL MAX is suitable for laying on heating and cooling screeds, in swimming pools and industrial floors, with the possibility to realize thicknesses up to 15 mm both indoors and outdoors.



Fields of use

- laying floor and wall of all types of ceramics, even with large format
- laying in civil, industrial and commercial spaces, even with high traffic
- laying in swimming pools and external walls
- laying of natural stones provided they are not sensitive to water and stains
- laying on heating and cooling screeds
- maximum compatibility with BASEFORTE AR 97 and AR 109 self-leveling screeds

Appearance

consistency: powder
color: white/grey

Consumption

approx. 3-4 kg/m²

Supports

- cement screeds and plasters, mortars, concrete (even smoothed)
- old ceramic floors and natural stone
- cement and acrylic waterproofing plasterboard
- plasterboard, gypsum based plasters and anhydrite screeds, after application of PRIMER IDROX

Data sheet

classification	C2TE S1
water in the mix	approx. 7,5 l/bag
open time	30 min
Adjustability time	45 min
time till walk-on	24-36 h
grouting	24-36 hrs on floor 4-6 hrs on wall

Adherence to substrate according to UNI EN 12004-2

adherence to initial traction	1,9 N/mm ²
adherence to traction after water immersion	1,3 N/mm ²
adherence to traction after heat action	2,0 N/mm ²
adherence to traction after cycles of freezing/melting	1,5 N/mm ²

CODE	COLOUR	PACKAGE	PACKAGE/PAL
1102005012	grey	25 kg	54
1102005013	white	25 kg	54

For the correct application please refer to the datasheet on the website www.fornacigrigolin.it

GrigoKoll® ULTRAX

White and grey flexible adhesive, with mixed binder, very high performance, workability and yield, for **laying of ceramic tiles and mosaics of any type and size**, and natural stones, provided they are not sensitive to water.

GRIGOKOLL ULTRAX is characterized by its **great workability and easy installation** and is particularly suitable for heating and cooling screeds, swimming pools and industrial floors. Possible to realize thicknesses up to 15 mm both indoors and outdoors.



Fields of use

- laying tiles of all kinds on floors and walls, even very large format
- laying in civil, industrial and commercial spaces, even with high traffic
- laying in swimming pools and exterior walls
- laying on heating and cooling screeds
- maximum compatibility with BASEFORTE AR 97 and AR 109 self-leveling screeds

Appearance

consistency: powder
color: extra white/grey

Consumption

approx. 3-4 kg/m²

Supports

- cement screeds and plasters, concrete (even smoothed), mortars
- cement and acrylic waterproofing plasterboard
- plasterboard, gypsum based plasters and anhydrite screeds, after application of PRIMER IDROX
- old ceramic floors and natural stones

Data sheet

classification	C2TE S1
water in the mix	approx. 8 l/bag
open time	30 min
adjustability time	45 min
time till walk-on	24-36 h
grouting	24-36 hrs on floor 4-6 hrs on wall

Adherence to substrate according to UNI EN 12004-2

adherence to initial traction	2,0 N/mm ²
adherence to traction after water immersion	1,4 N/mm ²
adherence to traction after heat action	2,1 N/mm ²
adherence to traction after cycles of freezing/melting	1,7 N/mm ²

CODE	COLOUR	PACKAGE	PACKAGE/PAL
1102005014	grey	25 kg	54
1102005015	extra-white	25 kg	54

For the correct application please refer to the datasheet on the website www.fornacigrigolin.it

GrigoKoll® RAPIDUX

Premixed adhesive with mixed binder, fast gluing, very performing and with good workability, for the installation of ceramic tiles of any type and size, and stones sensitive to stains but stable to water.

GRIGOKOLL RAPIDUX is suitable for application indoors and outdoors, overlapping, with thickness up to 15 mm.



Fields of use

- laying tiles of all kinds on floors and walls, even very large format
- laying in civil, industrial and commercial spaces, even with high traffic
- laying in swimming pools
- maximum compatibility with BASEFORTE AR 97 and AR 109 self-leveling screeds

Appearance

consistency: powder
color: grey

Consumption

approx. 3-4 kg/m²

Supports

- cement screeds and plasters, concrete, mortars
- old ceramic floors and natural stone
- cement and acrylic waterproofing plasterboard
- plasterboard, gypsum based plasters and anhydrite screeds, after application of PRIMER IDROX

Data sheet

classification	C2FT
water in the mix	ca. 6,5 l/bag
open time	15 min
adjustability time	30 min
time till walk-on	4-6 hrs
grouting	4-6 hrs on floor 2 hrs on wall

Adherence to substrate according to UNI EN 12004-2

adherence to initial traction	1,5 N/mm ²
adherence to traction after water immersion	1,1 N/mm ²
adherence to traction after heat action	1,5 N/mm ²
adherence to traction after cycles of freezing/melting	1,1 N/mm ²

CODE	COLORE	CONF	CONF/PAL
1102005011	grey	25 kg	54

For the correct application please refer to the datasheet on the website www.fornacigrigolin.it

GrigoKoll® VELOX

Extra white and grey **flexible adhesive with rapid hydration**, mixed binder, very high performance, workability and yield for **laying of ceramic tiles and mosaics of any type and size**, and stones sensitive to stains but stable to water.

GRIGOKOLL VELOX is particularly suitable for heating and cooling screeds, swimming pools and industrial floors. Possible to realize thicknesses up to 15 mm both indoors and outdoors.



Fields of use

- laying tiles of all kinds on floors and walls, even very large format
- overlapping existing tiles, even in large format
- laying in civil, industrial and commercial spaces, even with high traffic
- laying on heating and cooling screeds
- laying in swimming pools and exterior walls
- laying of stones stable and sensitive to stains
- maximum compatibility with BASEFORTE AR 97 and AR 109 self-leveling screeds

Appearance

consistency: powder
color: extra white/grey

Consumption

approx. 2,5-5 kg/m²

Supports

- cement screeds and plasters, concrete (even smoothed), mortars
- cement and acrylic waterproofing
- plasterboard, gypsum based plasters and anhydrite screeds, after application of PRIMER IDROX

Data sheet

classification	C2FT S1
water in the mix	approx. 8 l/bag
open time	20 min
adjustability time	30 min
time till walk-on	4-6 h
grouting	4-6 hrs on floor 2 hrs on wall

Adherence to substrate according to UNI EN 12004-2

adherence to initial traction	2,7 N/mm ²
adherence to traction after water immersion	1,3 N/mm ²
adherence to traction after heat action	2,3 N/mm ²
adherence to traction after cycles of freezing/melting	2,2 N/mm ²

CODE	COLOUR	PACKAGE	PACKAGE/PAL
1102005016	grey	25 kg	54
1102005017	extra-white	25 kg	54

For the correct application please refer to the datasheet on the website www.fornacigrigolin.it

GrigoKoll® GENIUX

Highly flexible adhesive particularly suitable for **laying on exterior walls, not completely dried substrates** and heating or cooling screeds.

GRIGOKOLL GENIUX is a mixed binder adhesive with very high performance, for laying of ceramic tiles and mosaics of any type and size, and natural stones, provided they are not sensitive to water and stains.

GRIGOKOLL GENIUX is specific for the **laying of large-format tiles**, to be used as a part of the **MAGNIFIx** system.



Fields of use

- laying tiles of all kinds on floors and walls
- laying of cotto, terracotta, natural stones and marbles, provided they are not sensitive to water and stains
- laying of mosaics of any kind
- maximum compatibility with BASEFORTE AR 97 and AR 109 self-leveling screeds

Appearance

consistency: powder
color: white/grey

Consumption

approx. 3-4 kg/m²

Supports

- cement screeds and plasters, concrete (even smoothed), mortars
- old ceramic floors and natural stones
- cement and acrylic waterproofing
- plasterboard, gypsum based plasters and anhydrite screeds, after application of PRIMER IDROX

Data sheet

classification	C2TE S2
water in the mix	approx. 8 l/bag
open time	30 min
adjustability time	45 min
time till walk-on	24-36 h
grouting	24-36 hrs on floor 4-8 hrs on wall

Adherence to substrate according to UNI EN 12004-2

adherence to initial traction	> 1 N/mm ²
adherence to traction after water immersion	> 1 N/mm ²
adherence to traction after heat action	> 1 N/mm ²
adherence to traction after cycles of freezing/melting	> 1 N/mm ²



CODE	COLOUR	PACKAGE	PACKAGE/PAL
1102005018	grey	25 kg	54
1102005019	white	25 kg	54

For the correct application please refer to the datasheet on the website www.fornacigrigolin.it

GrigoKoll® PRIMER X

Universal pigmented adhesion promoter based on special resins and quartz in dispersion.

GRIGOKOLL PRIMER X is ideal on smooth surfaces, on absorbent and non-absorbent substrates, on old cement and synthetic residues of synthetic glue, before applying skim plasters and adhesives.

It is **used in coatings overlap** before glue application.



Fields of use

- treatment of absorbent and non-absorbent substrates, whether they are adhesives, skim plasters, plasters
- particularly recommended before laying self-leveling smoothing screed on non-absorbent supports
- ideal as adhesion grout on synthetic glue residues

Appearance

consistency: liquid fluid
color: ocre yellow

Consumption

approx. 200-300 g/m²

Data sheet

theoretical consumption	0,14 l/m ²
dilution	ready to use if required max 10-15% with water
theoretical yield	7,1 m ² /l
waiting time for next application	24 h

CODE	PACKAGE	PACKAGE/PAL
1102005023	5 kg	20
1102005021	20 kg	33

For the correct application please refer to the datasheet on the website www.fornacigrigolin.it

GrigoKoll® OMNIX

Extra white epoxy-polyurethane bi-component universal adhesive for applications on all substrates. GRIGOKOLL OMNIX ensures **very high performance** and is particularly suitable for **laying natural stones sensitive to water and stains** and recomposed marbles. It can also be used as a waterproofing.



Fields of use

- laying on external walls
- laying on substrates subject to strong expansion
- laying natural stones sensitive to water and stains
- laying recomposed marbles
- laying of glass mosaic
- laying coatings on kitchen or worktops, on wood or on iron substrates
- maximum compatibility with BASEFORTE AR 97 and AR 109 self-leveling screeds

Appearance

component A: viscous paste
component B: straw-colored liquid

Consumption

for laying: approx. 1,5-2,5 kg/m²
for waterproofing: approx. 3-3,5 kg/m²

Supports

- metal
- pvc
- rubber
- gypsum-based plaster or panels
- wood, fiber cement, marine plywood, plasterboard
- mortars, screeds and cement plasters
- suitable for strong vibrating supports

Data sheet

classification	R2T S2
adjustability time	30 min
time till walk-on	8-12 h
grouting	8-12 hrs on floor 4-6 hrs on wall

CODE	COLOUR	PACKAGE
1102005020	white	bucket (A+B) 4,8 kg

For the correct application please refer to the datasheet on the website www.fornacigrigolin.it

GrigoKoll® MIX S2

Elastic latex, can be used as a replacement of dilution water.
GRIGOKOLL MIX S2, mixed with the GRIGOKOLL PLUX and GRIGOKOLL PROX adhesives, improves the adhesion to the substrates and the deformability, elevating the characteristics of the adhesive in two type, S1 or S2, depending on the dilution quantity.



Fields of use

- laying on external walls
- laying floor and wall ceramic tiles of all kinds, even very large format
- laying recomposed marbles
- laying in civil, industrial and commercial spaces, even with high traffic
- laying in swimming pools
- laying on heating and cooling screeds
- maximum compatibility with BASEFORTE AR 97 and AR 109 self-leveling screeds

Appearance

consistency: liquid
color: white

Consumption

refer to the technical documentation of the adhesives GRIGOKOLL PLUX and PROX

Supports

- cement screeds and plasters
- concrete (even smoothed)
- old ceramic floors of any kind also in exterior
- on plasterboard the use of BASEFORTE PRIMER IDROX is not essential, but recommended
- cement and acrylic waterproofing
- mortars
- gypsum plasters and anhydrite screeds, after application of PRIMER IDROX

Data sheet

open time 15 min

CODE

1102005022

PACKAGE

15 lt

For the correct application please refer to the datasheet on the website www.fornacigrigolin.it

GrigoKoll® TEXTILE

Membrane composed of 2 layers of polypropylene woven and an interposed fiber-glass mesh. It distributes evenly the tensions deriving from the foundation.

Necessary in the laying of large-format tiles in the MAGNIFiX system.



Fields of use

- specific for the MAGNIFiX system in laying large-format porcelain stoneware
- restoration of surfaces to be renewed, avoiding the risk of micro-lesions in the floor
- laying on a screed not completely cured
- allows to execute the floor without the geometric matching of the joints

Appearance

white roll

Data sheet

width	1000 mm
length	50 m
thickness	ca. 0,85 mm
longitudinal breaking load	1115 N/mm ²
lateral breaking load	1290 N/mm ²
longitudinal extension before breaking	8%
lateral extension before breaking	7%



CODE

1205090008

PACKAGE

roll 50 mq


For the correct application please refer to the datasheet on the website www.fornacigrigolin.it



Evolved solution for large slabs laying on floors and walls

The application cycle consists of 3 products and allows you to create, with the guarantee of a quality package, any flooring or wall with large plates, eliminating the problem of joints.



The floors and walls take shape and decorate the rooms, favoring the refinement of the most advanced big slabs in the market.

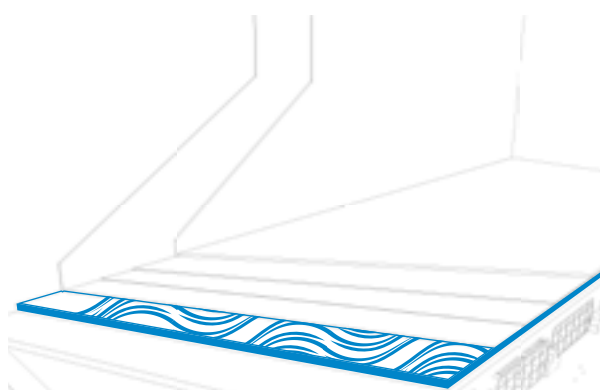

BASEFORTE GRIGOLEVEL

pag. 14


screed / existing support
≥ **GRIGOLEVEL**

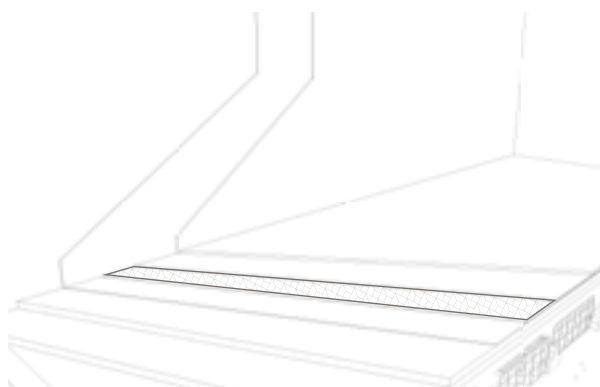

GRIGOKOLL TEXTILE

pag. 44

screed / existing support
GRIGOLEVEL
GENIUX - 1st layer
≥ **TEXTILE**

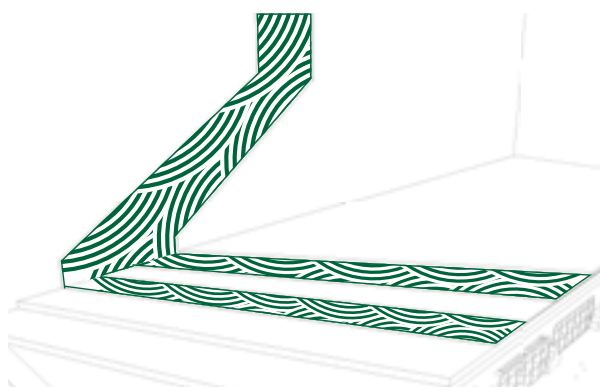

GRIGOKOLL GENIUX

pag. 40

screed / existing support
GRIGOLEVEL
≥ **GENIUX** - 1st layer
TEXTILE
≥ **GENIUX** - 2nd layer
large-format laying

For the correct application please refer to the datasheet on the website www.fornacigrigolin.it

GrigoKoll® WOOD TEC

Solvent free bi-component epoxy-polyurethane adhesive for laying wooden floors of any type and kind.



Fields of use

- laying of any type of wood, of any size
- laying of lamellar wood
- laying of industrial wood
- laying of pre-polished wood
- laying of lamparquet
- laying of pre-finished wood

Appearance

component A: beige color viscous paste
component B: straw-colored liquid

Consumption

approx. 1-1,4 kg/m²

Supports

- cement or lime-cement dried screeds
- rapid or semi-rapid hydration screeds
- old ceramic floors and natural stone
- heating and cooling screeds
- substrates made of concrete, metal, rubber, fiber cement, metal sheet
- screeds in anhydrite (smoothed) after application BASEFORTE PRIMER WD

Data sheet

open time	90-120 min
time till walk-on	12-18 h
usability	24-48 h

CODE

1102005043

PACKAGE

10 kg

For the correct application please refer to the datasheet on the website www.fornacigrigolin.it

GrigoKoll® WOOD BIOTEC

Single-component ready to use silanic adhesive for laying wooden floors of any type and kind.

GRIGOKOLL WOOD BIOTEC **is harmless** and is perfectly compatible with wood coatings in bio-construction projects.



Fields of use

- laying of lamellar wood
- laying of industrial wood
- laying of pre-polished wood
- laying of lamparquet
- laying of pre-finished wood

Appearance

consistency: viscous paste
color: beige

Consumption

approx. 0,8-1,1 kg/m²

Supports

- cement or lime-cement dried screeds
- rapid or semi-rapid hydration screeds
- old ceramic floors and natural stone
- heating and cooling screeds
- substrates made of concrete, metal, rubber, fiber cement, metal sheet
- screeds in anhydrite (smoothed) after application BASEFORTE PRIMER WD

Data sheet

open time	40-50 min
time till walk-on	6 h
usability	24-36 h

CODE

1102005044


PACKAGE

15 kg

For the correct application please refer to the datasheet on the website www.fornacigrigolin.it

*Beauty is a thin line, going through
the eyes to fill in the space. With style.*



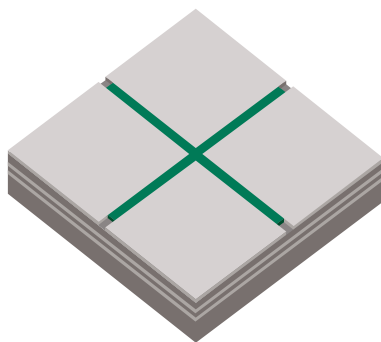

FugaStyle®

Grouting joints

Grouting joints must be characterized by an excellent resistance to thermal shock (frost, heated floors), chemicals, dirt, stains, water, on top of having a decorative function to highlight the aesthetic of floors and walls.

From a technical point of view, they must ensure filling and sealing.



FugaStyle®

CEM 1_8

Grouting cement for joints from 1 to 8 mm.
Color range with **harmonious finish**, ideal for any type of ceramics and any kind of marble and mosaics.
FUGASTYLE CEM 1_8 is water repellent, easy to clean and has **excellent workability and high abrasion resistance**.
It naturally prevents the proliferation of bacteria, fungi and molds.



Fields of use

- sealing of tile joints of all types in interior and exterior
- grouting of marble and natural stones
- sealing glass mosaic
- excellent abrasion resistance
- sealing on heating and cooling screeds

Appearance

consistency: powder
colors: 30 colors available (see pag. 54)

Data sheet

classification	CG2 WA
water in the mix	1,3 l per bag 5 kg
time till walk-on	24 h

COLOUR	PACKAGE	PACKAGE/PAL
various	box 20 kg (4x5 kg)	20

For the correct application please refer to the datasheet on the website www.fornacigrigolin.it

FugaStyle®

CEM 4_20

Grouting cement for joints from 4 to 20 mm.
Color range with **rustic finish**, ideal for any type of ceramics
and any kind of marble and mosaics.
FUGASTYLE CEM 4_20 is water repellent, easy to clean and
has **excellent workability and high abrasion resistance**.
It naturally prevents the proliferation of bacteria, fungi and
molds.



Fields of use

- sealing of tile joints of all types in interior and exterior
- grouting of marble and natural stones
- sealing of terracotta type products
- excellent abrasion resistance
- sealing on heating and cooling screeds

Appearance

consistency: powder
colors: 2 colors available (see pag. 52)

Data sheet

classification	CG2 WA
water in the mix	5 l per bag 25 kg
time till walk-on	24 h

Code	Color
1102560026	MANHATTAN GREY
1102560025	ASH GREY

COLOUR	PACKAGE	PACKAGE/PAL
various	25 kg	60

For the correct application please refer to the datasheet on the website www.fornacigrigolin.it































FugaStyle®

CEM

chart

30 colors

The colours shown are purely indicative and cannot be used as an absolute reference for matching

	COLORE	FUGASTYLE CEM 1_8 Scatola 20 kg Box 20 kg	FUGASTYLE CEM 1_8 Pallet 400 kg Pallet 400 kg
	04 Grigio Antracite	1102560007	1102510002
	03 Grigio Cenere	1102560008	1102510003
	01 Grigio Manhattan	1102560010	1102510004
	00 Bianco	1102560003	1102510001
	06 Jasmine	1102560011	1102510005
	08 Beige	1102560013	1102510006
	07 Anemone	1102560002	1102510014
	12 Moro	1102560014	1102510023
	10 Marrone	1102560012	1102510057
	11 Cotto	1102560005	1102510016
	24 Pergamon	1102560016	1102510025
	30 Nero assoluto	1102560051	1102510059
	29 Grigio Chiaro	1102560009	1102510021
	16 Caramel	1102560004	1102510058
	15 Rubino	1102560054	1102510026
	14 Amaranto	1102560001	1102510013
	09 Sabbia	1102560017	1102510027
	02 Ghiaccio	1102560006	1102510018
	42 Mogano	1102560088	1102510042
	41 Quercia	1102560087	1102510041
	40 Noce	1102560086	1102510040
	39 Faggio	1102560085	1102510039
	38 Cedro	1102560084	1102510038
	37 Sabbia chiara	1102560083	1102510037
	36 Tortora	1102560082	1102510036
	35 Acero	1102560081	1102510035
	34 Pino	1102560080	1102510034
	33 Grafite	1102560079	1102510033
	32 Grigio	1102560078	1102510032
	31 Silver	1102560077	1102510031

FugaStyle®

CEM

consumption table

Tile size in mm	FUGASTYLE 1_8 CEM joint thickness			
	2 mm	3 mm	5 mm	8 mm
	Joint theoretical consumption g/m²			
Glass Mosaic 20 x 20 x 3,8	1300			
Mosaic 50 x 50 x 4	450			
100 x 100 x 6	350	500	840	1350
75 x 150 x 7	400	600	980	1600
150 x 150 x 9	350	500	840	1350
200 x 200 x 9	250	380	630	1000
120 x 240 x 9			790	1300
200 x 300 x 9	200	300	530	850
300 x 300 x 10	190	280	470	750
300 x 600 x 10	140	210	350	560
400 x 400 x 10	140	210	350	560
500 x 500 x 10	110	170	280	450
600 x 1200 x 11	80	110	200	310

Tile size in cm	FUGASTYLE 4_20 CEM joint thickness						
	4 mm	5 mm	6 mm	8 mm	10 mm	15 mm	20 mm
	Joint theoretical consumption g/m²						
100 x 100 x 6	820	1020	1200	1650	2000		
150 x 150 x 9	820	1000	1200	1650	2000	3100	4100
200 x 200 x 9	610	770	910	1200	1550	2300	3100
120 x 240 x 9	770	950	1150	1500	1900	2900	3900
120 x 240 x 14	1200	1500	1800	2400	3000	4500	6000
200 x 200 x 9	610	770	920	1200	1550	2300	3060
200 x 200 x 14	950	1200	1400	1900	2400	3600	4800
200 x 300 x 9	510	650	770	1000	1280	1900	2550
300 x 300 x 10	450	570	680	900	1150	1700	2300
300 x 300 x 14	630	800	950	1300	1600	2400	3200
300 x 600 x 10	340	430	510	680	850	1300	1700
400 x 400 x 10	340	430	510	680	850	1300	1700
500 x 500 x 10	270	340	410	550	680	1020	1350
600 x 1200 x 11	190	250	280	370	470	700	950

For the correct application please refer to the datasheet on the website www.fornacigrigolin.it

FugaStyle® EPOX SUPER

Bi-component anti-mold epoxy sealant, for anti-acid sealing and laying of ceramic coatings with 2 to 15 mm joints. With a **highly aesthetic velvety finish**, available in 30 colors, FUGASTYLE EPOX SUPER can also be used as an adhesive (class R2T) to glue coatings on fiberglass and iron.



Fields of use

- sealing of flooring joints, ceramic coatings of all kinds, glass mosaics, on surfaces subject to chemical attack, or where a non-absorbent joint is desired, (eg dairies, laboratory benches, kitchen countertops, tanneries, paper mills, industrial kitchens, slaughterhouses, wineries)
- sealing of joints subject to heavy traffic, industrial warehouses, shopping centers, etc.
- particularly suitable for swimming pools, also filled with sea water and thermal water

Technical features

- excellent resistance to acids
- excellent resistance to alkalis
- excellent resistance to oils
- high resistance to abrasion and humidity
- it avoids cracks
- easy cleaning
- water repellent

Appearance

component A: viscous paste available in 30 colors (see pag. 57)
component B: straw-colored liquid

Data sheet

classification	R2T RG
time till walk-on	15/48 h

COLOR	PACKAGE
various	2 kg
various	5 kg

For the correct application please refer to the datasheet on the website www.fornacigrigolin.it































FugaStyle®

EPOX

chart

30 colors

The colours shown are purely indicative and cannot be used as an absolute reference for matching

	COLOR	FUGASTYLE EPOX SUPER 2 KG	FUGASTYLE EPOX SUPER 5 KG
	02 Nero	1102505043	1102505044
	03 Antracite	1102505001	1102505002
	04 Grigio 4	1102505058	1102505059
	30 Grigio Cemento	1102505038	1102505016
	50 Grigio Ferro	1102505060	1102505061
	55 Grigio Seta	1102505062	1102505063
	53 Grigio Perla	1102505064	1102505065
	54 Grigio Argento	1102505066	1102505067
	01 Bianco	1102505005	1102505006
	59 Bianco Antico	1102505068	1102505069
	10 Crema	1102505031	1102505032
	09 Avorio	1102505003	1102505027
	11 Beige	1102505028	1102505004
	41 Tortora	1102505070	1102505071
	58 Pergamena	1102505072	1102505073
	21 Rosa Antico	1102505047	1102505017
	20 Rosato	1102505048	1102505049
	19 Rosso Arancio	1102505050	1102505051
	56 Castagno	1102505074	1102505075
	48 Cioccolato	1102505076	1102505077
	42 Rovere	1102505078	1102505079
	57 Ulivo	1102505080	1102505081
	52 Caramello	1102505082	1102505083
	47 Celeste	1102505010	1102505030
	60 Blu Acciaio	1102505029	1102505009
	25 Verde Pallido	1102505054	1102505055
	27 Verde Scuro	1102505056	1102505057
	13 Giallo Sole	1102505034	1102505035
	08 Ghiaccio	1102505033	1102505011
	32 Neve	1102505045	1102505046

FugaStyle® EPOX consumption table

Tile size in cm	FUGASTYLE EPOX joint thickness								
	1,5	3	4	5	6	8	10	12	15
	Joint theoretical consumption g/m²								
10 x 10 x 6	0,25	0,50							
20 x 20 x 2	0,42	0,84							
20 x 20 x 4	0,84	1,68							
75 x 75 x 4	0,22	0,45	0,60	0,75	0,90				
75 x 75 x 6	0,34	0,67	0,90	1,12	1,34				
100 x 100 x 10	0,42	0,84	1,12	1,40	1,68	2,24	2,80		
150 x 150 x 6	0,17	0,34	0,45	0,56	0,67	0,90	1,12	1,34	1,68
100 x 200 x 6	0,19	0,38	0,50	0,63	0,76	1,01	1,26	1,51	1,89
100 x 200 x 10	0,32	0,63	0,84	1,05	1,26	1,68	2,10	2,52	3,15
150 x 300 x 15	0,32	0,63	0,84	1,05	1,26	1,68	2,10	2,52	3,15
200 x 200 x 9	0,19	0,38	0,50	0,63	0,76	1,01	1,26	1,51	1,89
200 x 200 x 14	0,29	0,59	0,78	0,98	1,18	1,57	1,96	2,35	2,94
300 x 300 x 10	0,14	0,28	0,37	0,47	0,56	0,75	0,93	1,12	1,40
400 x 400 x 10	0,11	0,21	0,28	0,35	0,42	0,56	0,70	0,84	1,05
500 x 500 x 12	0,10	0,20	0,27	0,34	0,40	0,54	0,67	0,81	1,01
600 x 600 x 12	0,08	0,17	0,22	0,28	0,34	0,45	0,56	0,67	0,84
600 x 1200 x 12	0,06	0,13	0,17	0,21	0,25	0,34	0,42	0,50	0,63



For the correct application please refer to the datasheet on the website www.fornacigrigolin.it

FugaStyle® EPOX SPLENDOR

Liquid detergent without caustic soda and other alkalis,
containing odorless solvent.
Particularly suitable for removing any residue of FUGASTYLE
EPOX SUPER epoxy sealant from ceramic and glass coating
surfaces, and in general on non-absorbent materials.



Fields of use

- removal of epoxy sealant residues
- cleaning of the tools previously used with epoxy resins
- as diluted is an excellent degreaser of very dirty ceramic floors

Technical features

- attacks and dissolves the epoxy resins
- odorless

Appearance

consistency: liquid
color: transparent

Consumption

150 g/m² depending on the degree of residues to be removed

Data sheet

conservation

12 months in a dry and
protected place

CODE

1102505023

PACKAGE

0,75 lt - 8 pz/PACKAGE

For the correct application please refer to the datasheet on the website www.fornacigrigolin.it

FugaStyle® DTG ACIDO

Acid-based cleaner for the removal of cement residues from ceramic tiles and tools.

FUGASTYLE DTG ACIDO is ready to use and is applied with a hard brush or a normal domestic brush. It is sufficient to wash thoroughly the floor at the end of application to avoid the formation of halos.



Fields of use

- removal of scales of cement-based or lime-based products
- removal of scales on construction tools used on building site
- essential for an excellent final cleaning of the finishing

Appearance

consistency: liquid
color: transparent

Consumption

approx. 100-200 g/m²

Data sheet

pH 2,2 ± 0,5

CODE	PACKAGE
1102005042	1 kg
1102005029	10 kg

For the correct application please refer to the datasheet on the website www.fornacigrigolin.it

Notes

SEDE AMMINISTRATIVA
ADMINISTRATIVE HEADQUARTERS
HAUPTSITZ

Via Foscarini, 2 31040 Nervesa della Battaglia TV
 Tel. +39 0422 5261 - Fax +39 0422 526 299
 info@fornacigrigolin.it
 www.fornacigrigolin.it
 www.artemuri.it

NUMERO VERDE **800 350907**
NUMERO VERDE ordine colori **800 500555**

STABILIMENTI DI PRODUZIONE
PRODUCTION PLANTS
PRODUKTIONSSTÄTTEN

I-31010 Ponte della Priula TV Via Bombardieri 14
 Tel. +39 0438 4465 Fax +39 0438 446497/50

I-35010 Borgoricco PD Via dell'Industria 7/A
 Tel. +39 049 9335769 Fax +39 049 9338315

I-33078 San Vito al Tagliamento PN Via Armenia 1
 Tel. +39 0434 857035 Fax +39 0434 857916

I-25080 Nuvolera BS Via Dei Marmi
 Tel. +39 030 690111 Fax +39 030 69011217

I-24060 Zandobbio BG Via Grena
 Tel. +39 035 4274011 Fax +39 035 4274022

I-15062 Bosco Marengo AL Via Vecchia Reale Z.I.
 Tel. +39 0131 298471 Fax +39 0131 298464

I-43014 Medesano PR Via Solferino - Località Ramiola
 Tel. +39 0525 415110 Fax +39 0525 404374

I-00034 Colferro Roma Loc. Piombinara Z.I. Sloi
 Tel. +39 06 97201014 Fax +39 06 97201048

D-76275 Ettlingen/Karlsruhe Siemensstrasse 26
 Tel. +49 7243 71560 Fax +49 7243 715690

D-14798 Havelsee, Fohrde, An der B102
 Tel. +49 (0)33834 409888

FILIALI
BRANCHES
FILIALEN

arteMURI GmbH
 D-76185 Karlsruhe – Fritz-Haber-strae 6
 Tel. +49 721 5709440 – Fax +49 721 5709444
 D-68169 Mannheim - Zielstr. 12°
 D-69254 Malsch (bei Heidelberg) Am Bahnhof 8
 D-77656 Offenburg – Heinrich-Hertz-Str. 18
 D-88045 Friedrichshafen – Anton-Sommer-Str. 6

Grigolin SA
 CH-6805 Mezzovico – Via Cantonale Centro QI
 Tel. +41 91 9228706 – Fax +41 91 9228708

DEPOSITI
WAREHOUSES
HAUPTLAGER

I-39100 Bolzano BZ - Via Fermi 21
 Tel. +39 0471 1886099

I-25080 Paitone BS - Via Italia 51
 Tel. +39 030 6897558 - Fax +39 030 6916499

I-25030 Villa Erbusco BS – Via per Iseo 42
 Tel. +39 030 7703795 – Fax +39 030 7242949

I-24020 Casnigo BG - Via Lungo Romna 45/B
 Tel. +39 327 8921520

I-22040 Lurago d'Erba CO - via Fornace, 2
 Tel. +39 031 5620234

I-10072 Mappano TO - via Cottolengo, 51
 Tel. +39 011 0704842

I-32037 Sospirolo BL - Via Masiere
 Tel. +39 0437 87797 – Fax +39 0437 87797

I-35010 Limena PD - Via Pierobon 26
 Tel. +39 049 8842494 – Fax +39 049 8846805

I-44040 Chiesuol del Fosso FE - Via Sammartina 52
 Tel. +39 0532 978424 – Fax +39 0532 978424

I-81033 Casal di Principe CE - Via Vaticale 337
 Tel. +39 392 9500373

I-87064 Corigliano Calabro CS - Via Santa Lucia
 Tel. +39 0983 885318 - +39 335 1354222

I-70059 Trani BT - Via Torrente Antico 14
 Tel. +39 0883 583632 Tel. +39 0532 978424 – Fax +39 0532 978424

I-70026 Modugno BA - Via delle Mimose 11
 Tel. +39 0835 271652

I-95100 Catania CT - Via A. Stoppani 21
 Tel. +39 095 346901

I-09028 Sestu ad Assemini CA - S.P. 8
 Tel. +39 070 948148



Gruppo Grigolin

Da oltre 55 anni un punto di riferimento
 importante per il settore dell'edilizia